
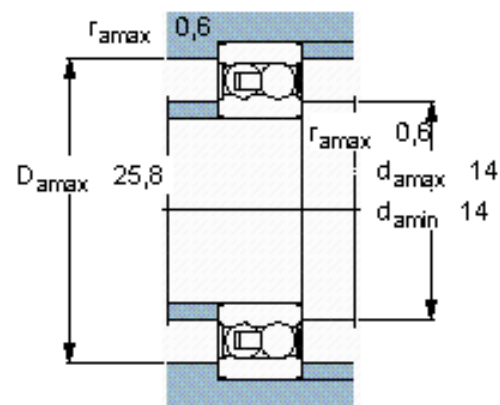


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit Pu	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C0	kN	r/min		kg	-
10	30	14	5,53	1,18	0,06	-	17000	0,048	2200 E-2RS1TN9

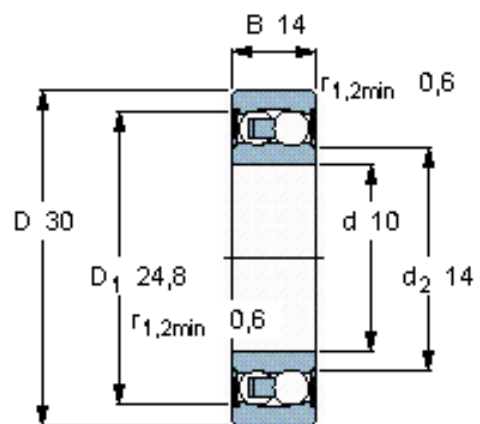

Calculation factors

e 0,33
 Y_1 1,9
 Y_2 3
 Y_0 2