
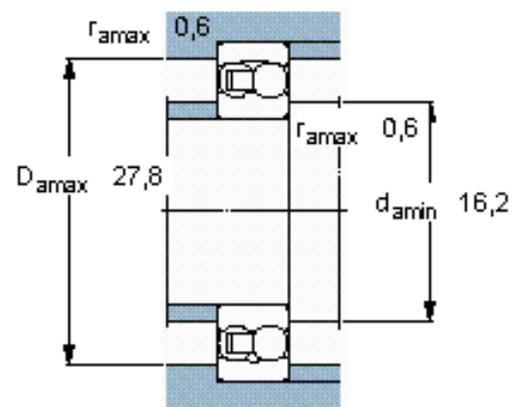


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit Pu	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C0	kN	r/min	kg	-	
12	32	14	8,52	1,9	0,098	45000	30000	0,053	2201 ETN9

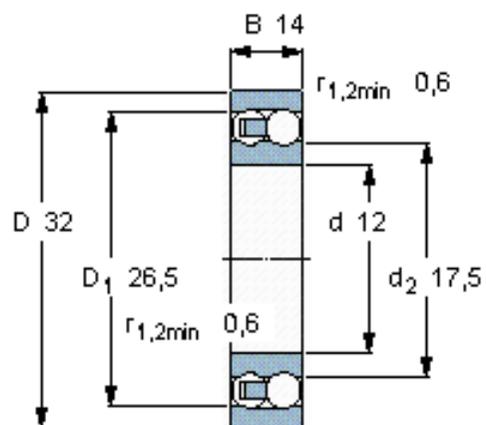

Calculation factors

e 0,5
 Y_1 1,25
 Y_2 2
 Y_0 1,3