
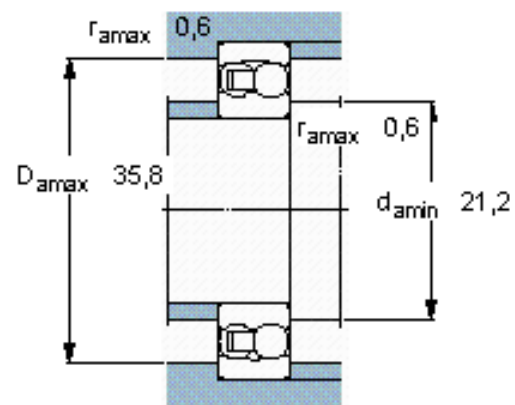


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit Pu	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C0	kN	r/min		kg	-
17	40	16	10,6	2,55	0,14	34000	24000	0,088	2203 ETN9

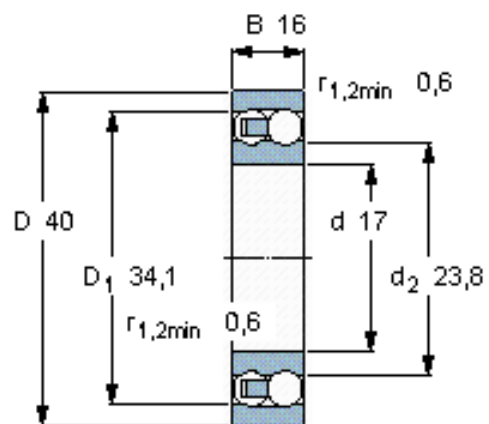

Calculation factors

e 0,43
 Y_1 1,5
 Y_2 2,3
 Y_0 1,6