
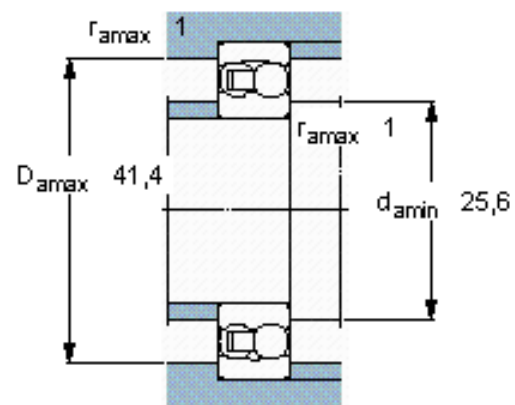


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit Pu	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C0	kN	r/min		kg	-
20	47	18	16,8	4,15	0,22	28000	20000	0,14	2204 ETN9

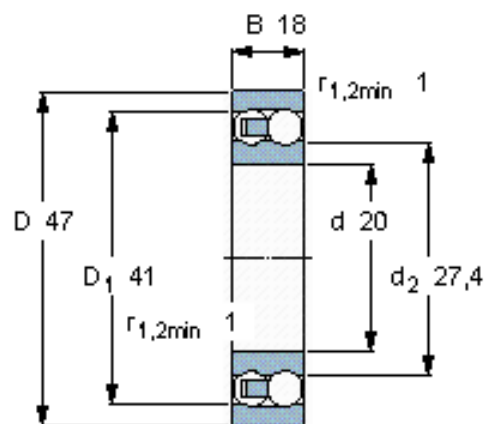

Calculation factors

e 0,4
 Y_1 1,6
 Y_2 2,4
 Y_0 1,6