
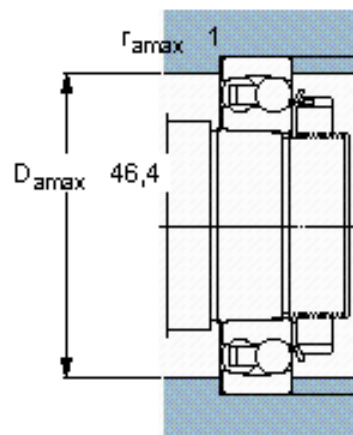


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit Pu	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C0	kN	r/min		kg	-
25	52	18	16,8	4,4	0,23	26000	18000	0,16	2205 EKTN9

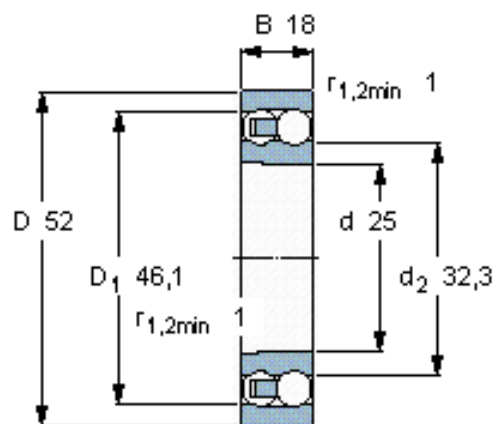

Calculation factors

e 0,35
 Y_1 1,8
 Y_2 2,8
 Y_0 1,8