
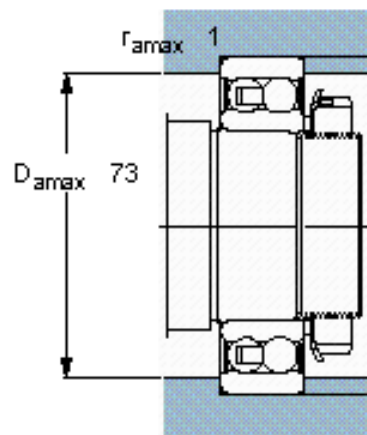


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit Pu	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C0	kN	r/min		kg	-
40	80	23	19,9	6,95	0,36	-	5600	0,5	2208 E-2RS1KTN9

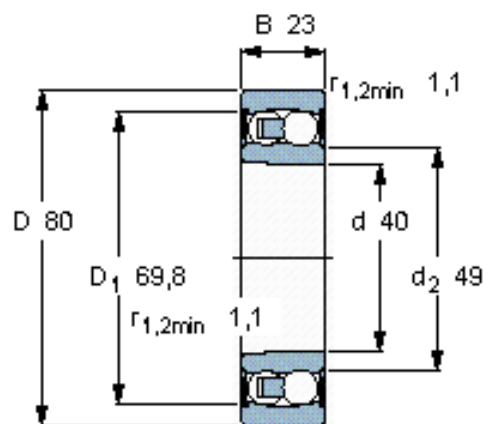

Calculation factors

e 0,22
 Y_1 2,9
 Y_2 4,5
 Y_0 2,8