
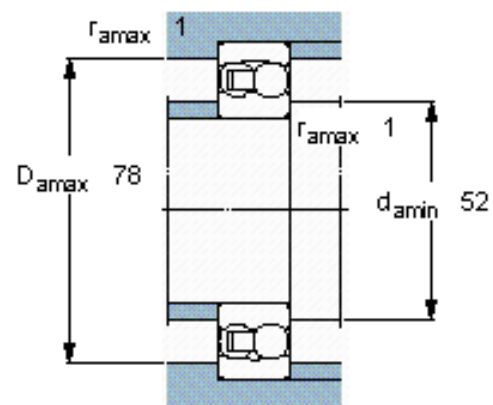


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit Pu	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	-
45	85	23	32,5	10,6	0,54	15000	10000	0,55	2209 ETN9

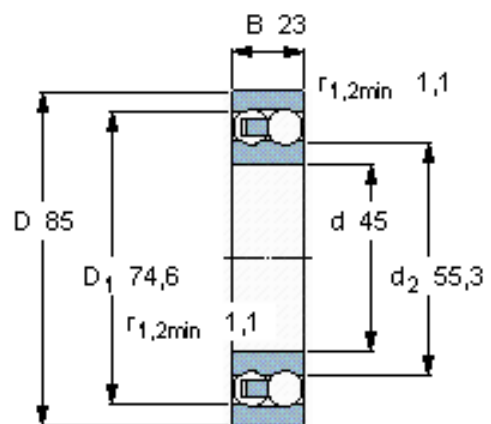

Calculation factors

e 0,26
 Y_1 2,4
 Y_2 3,7
 Y_0 2,5