
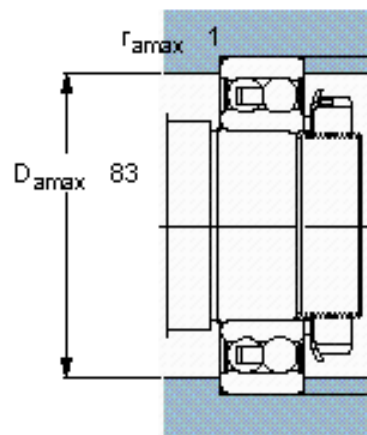


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit Pu	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C0	kN	r/min		kg	-
50	90	23	22,9	8,15	0,42	-	4800	0,57	2210 E-2RS1KTN9

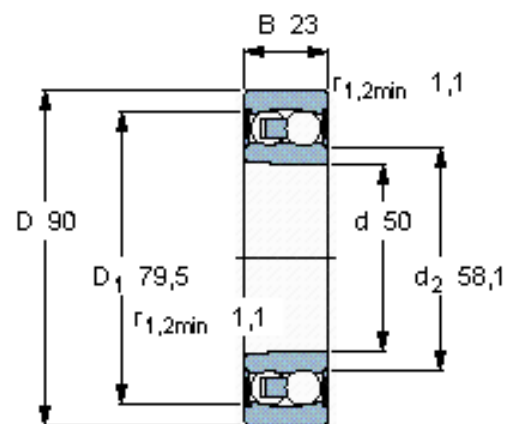

Calculation factors

e 0,2
 Y_1 3,2
 Y_2 4,9
 Y_0 3,2