


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
d	D	B	dynamic C	static C0	Pu	Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	-
55	100	25	39	13,4	0,7	12000	8500	0,81	2211 ETN9

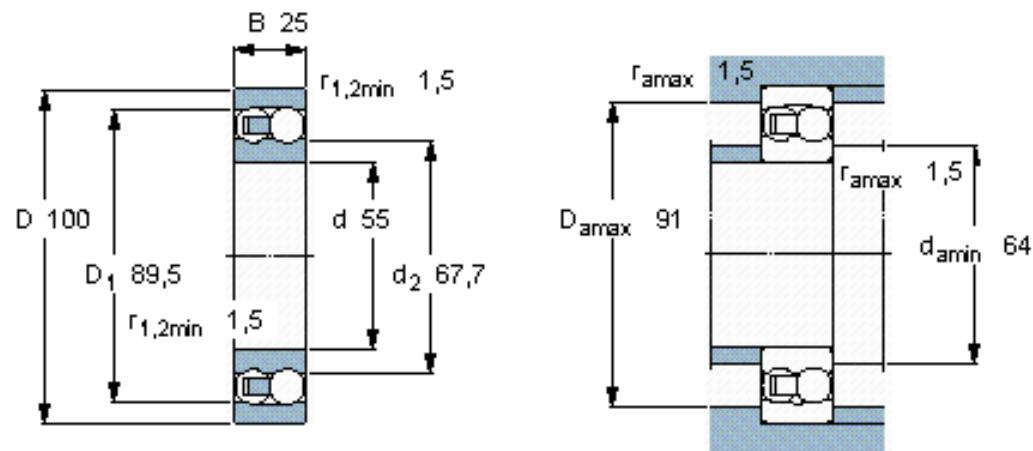

Calculation factors

e 0,23
 Y₁ 2,7
 Y₂ 4,2
 Y₀ 2,8