


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
d	D	B	dynamic C	static C0	Pu	Reference speed	Limiting speed		
mm			kN		kN	r/min		kg	-
60	110	28	48,8	17	0,88	11000	8000	1,1	2212 ETN9

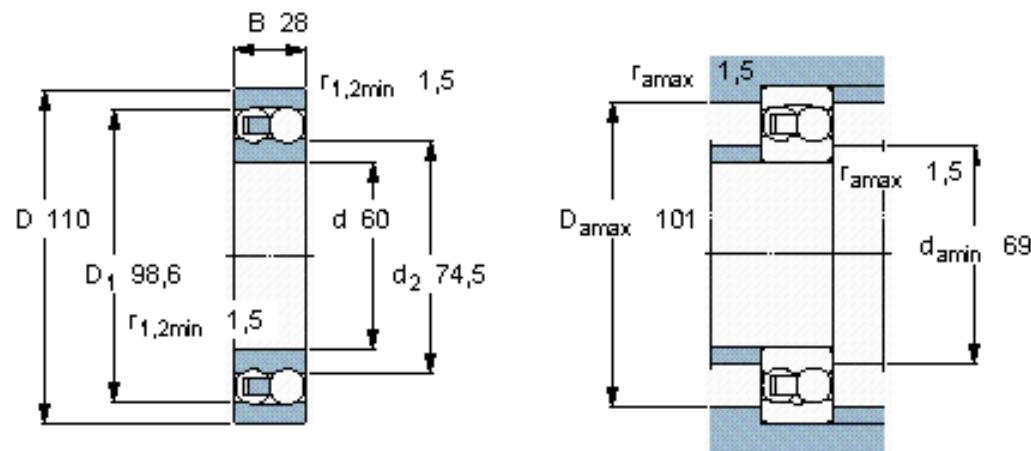

Calculation factors

e 0,24
 Y₁ 2,6
 Y₂ 4,1
 Y₀ 2,8