
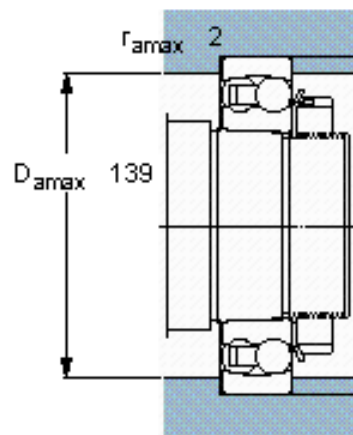


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit Pu	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C0	kN	r/min		kg	-
85	150	36	58,5	23,6	1,12	8000	5600	2,4	2217 K

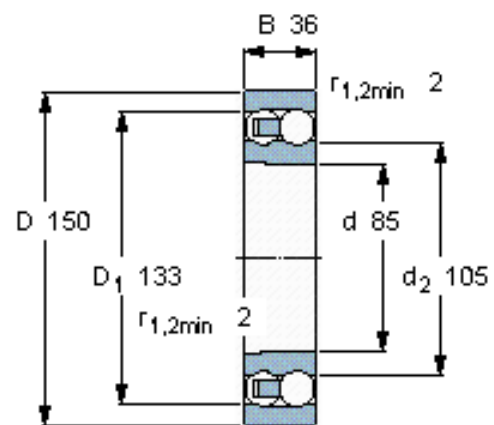

Calculation factors

e 0,25
 Y_1 2,5
 Y_2 3,9
 Y_0 2,5