
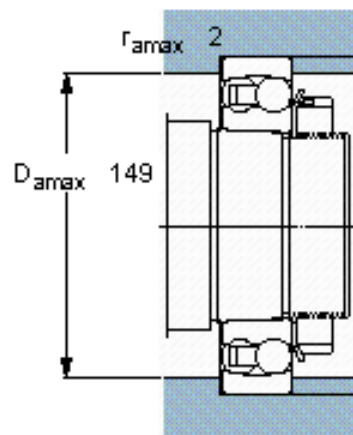


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit Pu	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C0	kN	r/min		kg	-
90	160	40	70,2	28,5	1,32	7500	5300	3,2	2218 K

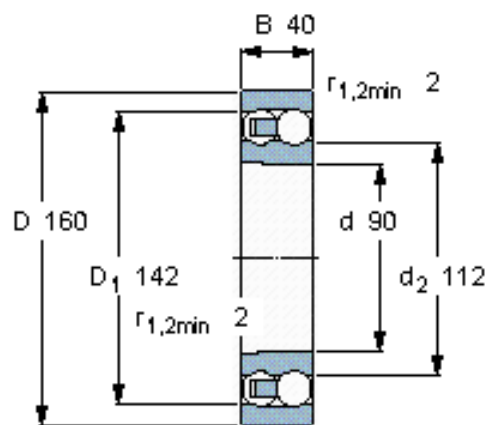

Calculation factors

e 0,27
 Y_1 2,3
 Y_2 3,6
 Y_0 2,5