
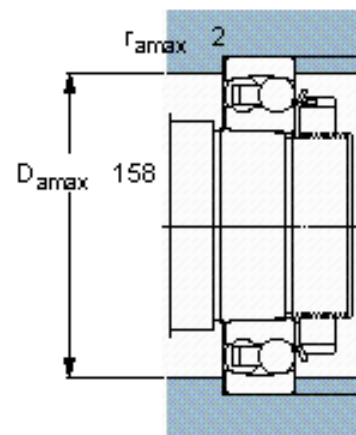


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit Pu	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C0	kN	r/min		kg	-
95	170	43	83,2	34,5	1,53	7000	5000	3,9	2219 KM

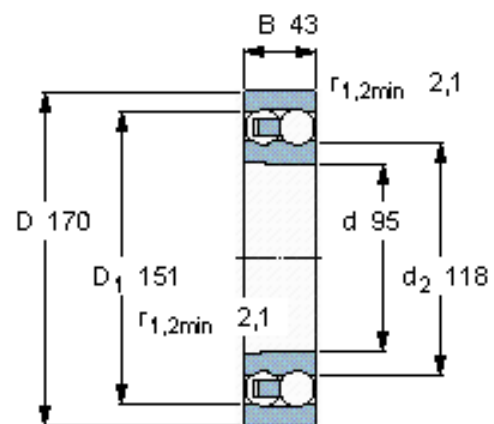

Calculation factors

e 0,27
 Y_1 2,3
 Y_2 3,6
 Y_0 2,5