
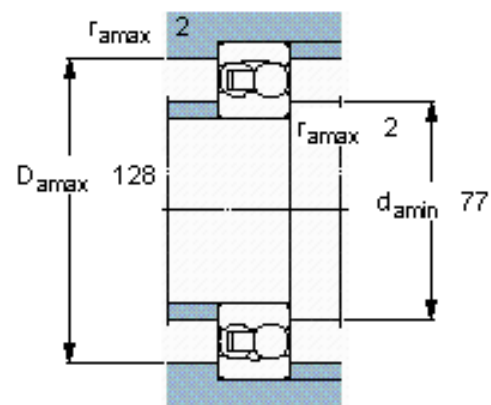


Self-aligning ball bearings, cylindrical and tapered bore

| Principal dimensions | | | Basic load ratings | | Fatigue load limit Pu | Speed ratings | | Mass | Designation |
|----------------------|-----|----|--------------------|--------|--------------------------|-----------------|----------------|------|-------------|
| d | D | B | dynamic | static | | Reference speed | Limiting speed | | |
| mm | | | kN | C0 | kN | r/min | kg | - | |
| 65 | 140 | 48 | 95,6 | 32,5 | 1,66 | 9000 | 6300 | 3,25 | 2313 |

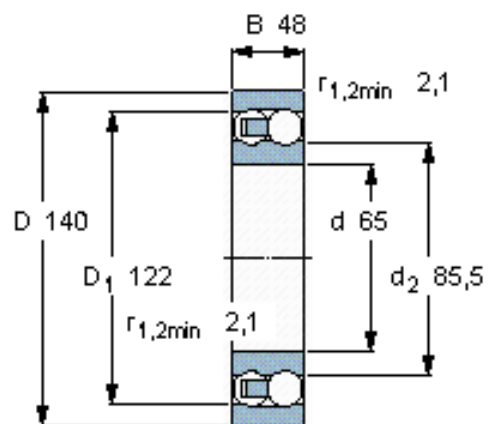

Calculation factors

e 0,37
 Y_1 1,7
 Y_2 2,6
 Y_0 1,8