
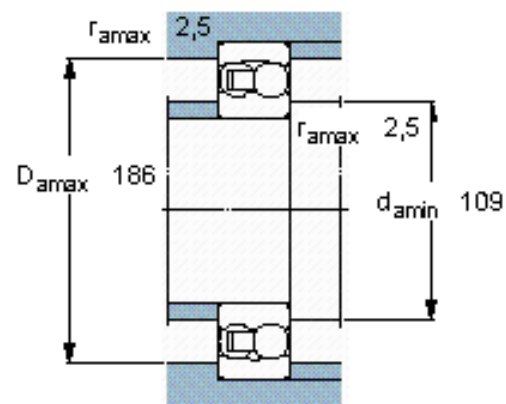


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Fatigue load limit Pu	Speed ratings		Mass	Designation
d	D	B	dynamic	static		Reference speed	Limiting speed		
mm			kN	C0	kN	r/min		kg	-
95	200	67	165	64	2,75	6000	4500	9,8	2319 M

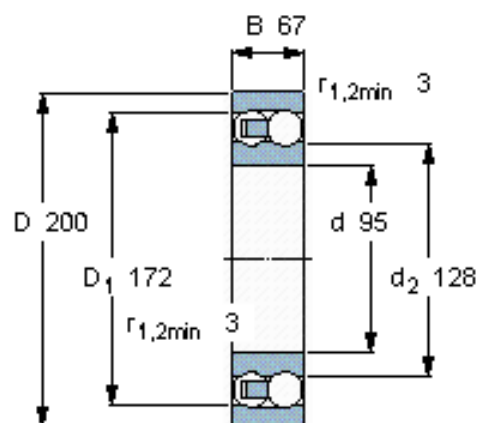

Calculation factors

e 0,37
 Y_1 1,7
 Y_2 2,6
 Y_0 1,8