


Spherical roller bearings, cylindrical and tapered bore

| Principal dimensions | | | Basic load ratings | | Fatigue load limit Pu | Speed ratings | | Mass | Designation |
|----------------------|-----|-----|--------------------|--------|--------------------------|-----------------|----------------|------|-----------------|
| d | D | B | dynamic | static | | Reference speed | Limiting speed | | |
| mm | | | kN | | kN | r/min | | kg | - |
| 400 | 600 | 148 | 3250 | 5700 | 400 | 850 | 1100 | 145 | 23080 CCK/W33 * |

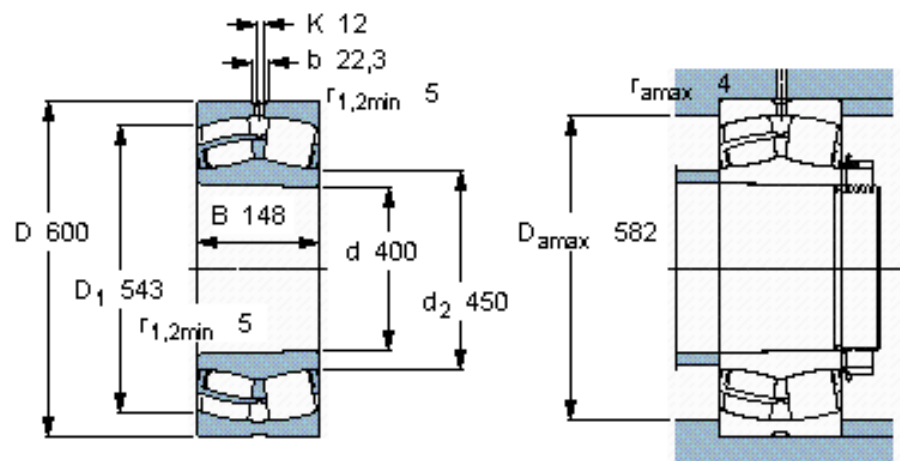

Calculation factors

e 0,23
 Y₁ 2,9
 Y₂ 4,4
 Y₀ 2,8