


Spherical roller bearings, cylindrical and tapered bore

| Principal dimensions | | | Basic load ratings | | Fatigue load limit Pu | Speed ratings | | Mass | Designation |
|----------------------|-----|-----|--------------------|--------|--------------------------|-----------------|----------------|------|-----------------|
| d | D | B | dynamic | static | | Reference speed | Limiting speed | | |
| mm | | | kN | | kN | r/min | | kg | - |
| 260 | 440 | 144 | 2550 | 3900 | 290 | 1100 | 1400 | 87,5 | 23152 CCK/W33 * |

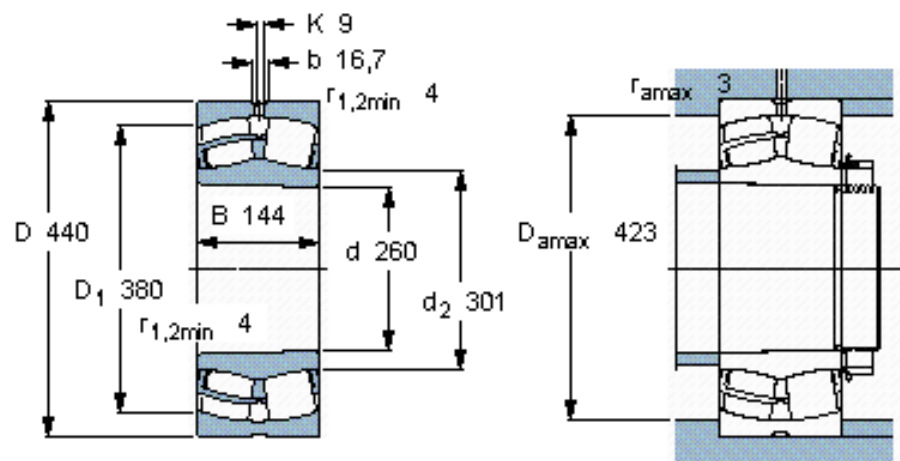

Calculation factors

e 0,31
 Y₁ 2,2
 Y₂ 3,3
 Y₀ 2,2