


Spherical roller bearings, cylindrical and tapered bore

| Principal dimensions | | | Basic load ratings | | Fatigue load limit Pu | Speed ratings | | Mass | Designation |
|----------------------|-----|-----|--------------------|--------|--------------------------|-----------------|----------------|------|-------------------|
| d | D | B | dynamic | static | | Reference speed | Limiting speed | | |
| mm | | | kN | | kN | r/min | | kg | - |
| 180 | 300 | 118 | 1400 | 2160 | 196 | 1300 | 1700 | 34,0 | 24136 CCK30/W33 * |

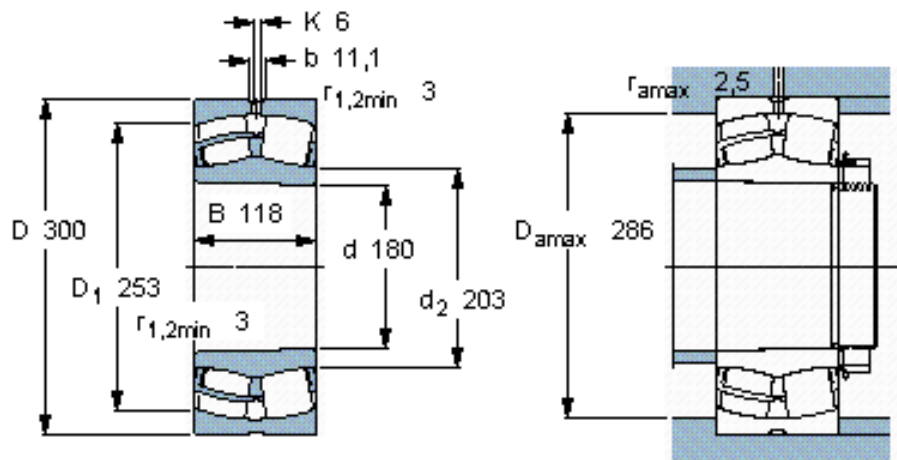

Calculation factors

e 0,37
 Y₁ 1,8
 Y₂ 2,7
 Y₀ 1,8